


## TECHNICAL CHARACTERISTICS

### • WEIGHTS & DIMENSIONS

- Berths : 4
- Overall length (m) : 7.8
- Longueur extérieure carrosserie : 6.6
- Longueur intérieure : 5.8
- Overall height (m) / Internal height (m) : 2,58/1,95
- Overall width (m) : 2.3
- Largeur intérieure : 2.15
- Empty weight (m) : 1520
- Mass in running order (kg) +/-5% : 1537
- CU Minimum Obligatoire : 86
- PVOM + CU MINI : 1623
- Max authorized weight (kg) : 1900
- Administrative payload increase (kg.) : 1800
- Technical payload increase (kg.) : N/A
- Développé auvent +/-5% : 10.47
- Spare wheel dimensions : 195R14C

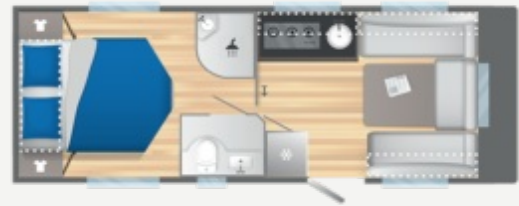

Number of people	4 berths
Overall length with tow hitch (m)	7.8m
Maxi authorised weight (Kg.)	1900

### • CHASSIS

- Shock-absorbers
- AKS 3004
- Heavy duty corner steadies (6 kg.)
- Alu wheels and steel spare wheel (16 kg.)
- Awning light
- Opening windows : 7
- 3rd brake light
- Steel spare wheel
- Drawbar cover
- Luggage door (100x40cm) : 2
- Leisure Air-conditioning preparation
- Electric doorstep
- XL Entrance door (Hartal 61 cm)
- GRP Roof, Sides & Under-floor
- Construction exclusive IRP
- Bike stand preparation rear

### • EQUIPMENT

- Combi 6E boiler (10L) and heater
- Blown air Trumavent 12V
- Combined blinds & fly nets
- Mosquito-net entrance door
- Skylight 700\*500
- Panoramic heki skylight Héki 2
- Skyview window
- TV-preparation (socket and cable)
- SAT- preparation
- Solar panel preparation
- TV Brackett
- TV socket in awning
- LED lightning
- Smoke detector

### • KITCHEN

- Stainless steel sink & 3 burners
- Exterior gas socket
- Extractor hood
- Gas oven
- Fridge 140L slim tower
- Fresh water tank 50L
- Waste water tank 30L (wheeled)
- Spice rack
- LED lightning

### • BATHROOM

- Thetford electric cassette toilet
- Exterior water socket
- Separated shower

### • BEDROOM

- Dimensions couchage avant (cm) : 140/150x210
- Dimensions couchage arrière (cm) : 150x200
- Slatted bed bases and adjustable head part
- Bed gas strut
- Comfort mattresses (17 cm)
- LED lightning

### • ELECTRICAL INSTALLATION

- Transformer / charger module 230V/12V including ground fault circuit breaker
- Electronic control panel "Lux" with Truma I-Net
- Truma I-Box for smartphone
- Sockets 230V : 6
- USB sockets : 2
- Lichtdimmer plafonniers zitaroen